

Introducing the **WORLD'S FIRST** Laser Distance Meters specified to measure in accordance with **ISO 16331-1!**



Leica DISTO™ E7300

Part # 788211, \$199 USD MAP

- Range: 2in to 265ft (80 meters)
- Accuracy ± 1.0 mm (better than 1/16th in.)
- Area calculation
- Volume calculations
- Pythagoras 2-point and 3-point measurements
- Stake out function (1value)
- Memory (last 10 results)
- Multifunctional end piece with automatic detection
- IP54 (dust and splash water protected)



Leica DISTO™ E7400x


Part # 788472, \$279 USD MAP

- Robust – 6ft drop tested
- Protection Class IP65 Dust and water protection
- Tilt Sensor 360°
- Range: 2 in – 265 feet (80 meters)
- Accuracy: +/- 1.0mm (better than 1/16th in)
- Smart Horizontal Mode™ (incl. indirect height)
- Height tracking
- Multifunctional end-piece with automatic detection
- Area, Volume calculations
- Triangle Area
- Stake out (2 values)
- Memory (last 20 displays)




The ISO Standard 16331-1 takes the following measuring conditions into account:


Favorable Conditions

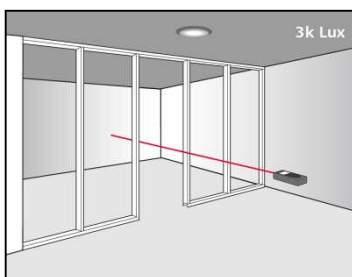

Unfavorable Conditions

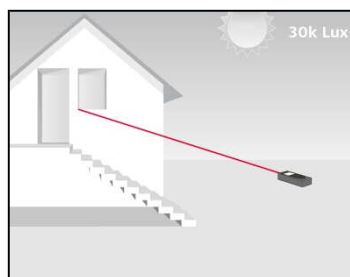

Other Specified Conditions

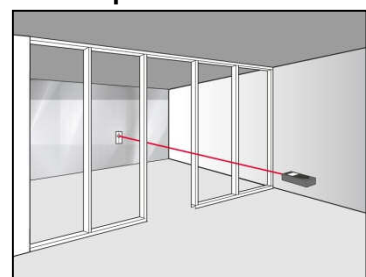

- when it has to be **right**

Leica
Geosystems